



# Compak Vacuum Sand Filter



Compak model Vacuum Sand Filter is unique to the industry in design and performance, combining the highest quality filtration with unmatched efficiency in operation. Combining exceptional filtration, water clarity, and unmatched efficiency in a space saving design makes these some of the best filters available.

Long filter runs help reduce water consumption and provide significant chemical savings. Adding Evacuator® Technology around the perimeter reduces corrosive airborne particulates, which saves the facility money, especially on indoor Compaks.



## Features & Benefits

- All models are IAPMO R&T® certified ranging from 30 FT<sup>2</sup>-240 FT<sup>2</sup> of area
- Type 316L stainless steel construction
- Air scour reduces backwashing, conserving resources
- Filter houses pumps, pipes, valves, & media
- Fibergrate protective covering
- Non-corrosive internals
- May eliminate or reduce surge requirements
- Perforated equalization screen for balanced influent distribution
- Built for long-term, heavy-duty use
- Evacuator® Technology vents corrosive air off of surface
- May earn points toward LEED certification

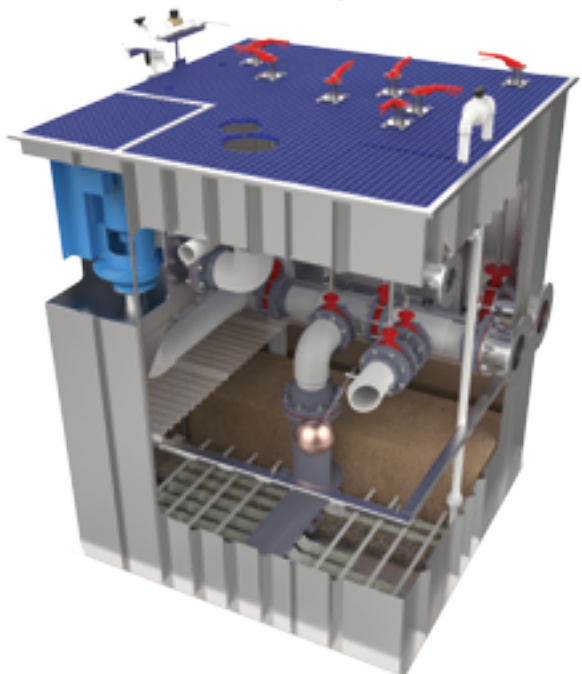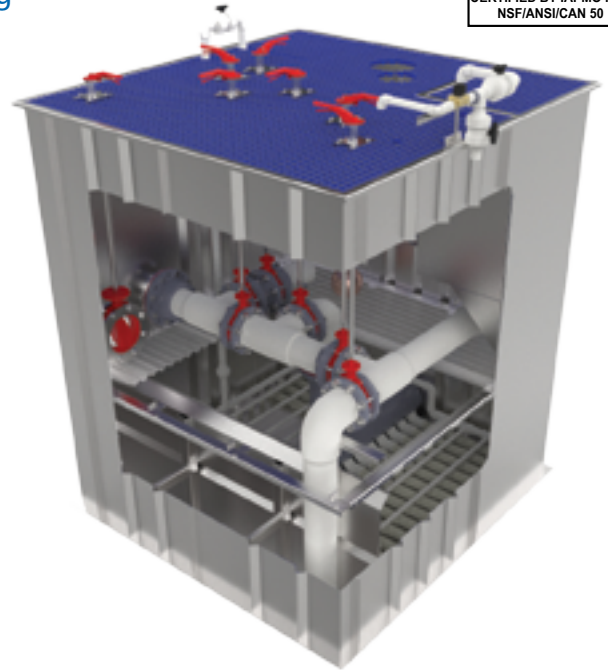

Featuring  
**PADDOCK**  
**EVACUATOR**  
CHLORAMINE REMOVAL SYSTEM  
Technology





Size	Model	Filter Rate in GPM@	Backwash Rate @	Tank Volume	Length	Width	M.D. & P.O, Pipe Std.	Ret./BE Pipe Std.	Shipping Weight	Media Capacity Cu. FT.	
FT <sup>2</sup>	Number	15 GPM/ FT <sup>2</sup>	7.5 GPM/ FT <sup>2</sup>	Gal.	A, in.	B, in.	Sizes-D, in.	D, in.	lbs	Sand	Gravel
30	9792-1530	450	225	2496	82	85	8	6	2600	47	9
35	9792-1535	525	262	2496	82	85	10	6	2900	48	10
40	9794-1540	600	300	2633	91	85	10	6	3200	60	11
45	9794-1545	675	337	3127	91	94	10	6	3500	67	12
50	9794-1550	750	375	3450	100	94	12	6	3600	75	14
55	9794-1555	825	412	3706	106	96	12	6	3700	85	16
60	9795-1560	900	450	3924	112	96	12	6	3900	89	18
65	9795-1565	975	487	4142	118	95	12	8	4100	96	20
70	9795-1570	1050	525	4505	128	96	12	8	4400	103	22
75	9795-1575	1125	562	4978	141	96	14	8	4600	114	25
80	9796-1580	1200	600	5123	145	96	14	8	4800	125	26
85	9796-1585	1275	637	5450	154	96	16	8	5000	131	27
90	9796-1590	1350	675	5741	162	96	16	8	5400	138	29
95	9796-1595	1425	712	6068	171	96	16	8	6000	142	30
100	9798-15100	1500	750	6650	187	96	16	8	7400	146	32
105	9798-15105	1575	788	6972	198	96	(2) 12	10	7550	156	23
110	9798-15110	1650	825	7259	206	96	(2) 12	10	7700	174	24
115	9798-15115	1725	863	7547	214	96	(2) 12	10	7850	192	26
120	9798-15120	1800	900	7834	222	96	(2) 12	10	8000	210	27
125	9798-15125	1875	938	8158	231	96	(2) 12	10	8490	228	28
130	9798-15130	1950	975	8481	240	96	(2) 14	10	8790	846	30
140	9798-15140	2100	1050	9128	258	96	(2) 14	10	9100	282	34

Larger sizes available upon request

